

An *aggressive* *new breed* of CtP plate processors

The Raptor 68/85 Silver

Incorporates leading-edge product design and styling, innovative full featured processing in a compact, space saving "small footprint" application. The processor has been developed in close cooperation with the world's leading silver diffusion plate and equipment suppliers.



Available in two formats, 68 cm (26.8") version covering formats 2-up and 4-up (portrait) and 85 cm (33.5") version covering 4-up and 8-up (portrait). As a stand alone unit, or configured for on-line operation with all the market's leading platesetters, this smaller and more efficient processor has more than enough capacity to support the most challenging medium sized clients. The pricing of this CtP processor now also makes it affordable to a substantially broader market segment.

State-of-the-art processing, flexibility, an excellent value for investment and Glunz & Jensen's proven reliability, give the Raptor 68/85 Silver "Quality by instinct".

Trouble free cleaning

Because of the new snap lock bearings, rollers require no adjustment, they may be cleaned or replaced in just moments.



Convenient servicing

The processor offers easy access for maintenance. Many components such as spray bars and circulation pumps may be removed without tools.



External wash water reservoir

Raptor Silver features easy access wash unit, with economical water/waste reduction system and the patent pending FoamBuster.



Accurate replenishment

The advanced electronics calculate the amount of media used versus run-time and maintains stable, waste-free processing.



Developer section

The UniFlow system and the intelligent design ensure optimal flow in the developer section.



Intuitive interface

Raptor's control panel includes: control for on-line processors, diagnostics and parameter setting.






Raptor complies with CE and c/UL-UL safety standards and is designed, manufactured and tested according to Glunz & Jensen's Quality Management System which meets DS/EN ISO 9001 standards.



Technical specifications

Raptor 68/85 Silver

| | |
|-------------------------------------|--|
| Materials | Silver diffusion plates |
| Certified for | Agfa Lithostar™ plates |
| Capacity | 40 - 120 cm / min. (15.7 - 47.2" / min.) |
| Material width | 675 / 850 mm (26.6 / 33.5") |
| Material length | 290 - 1100 mm (11.4 - 43.3") |
| Material thickness | 0.15 - 0.3 mm (0.006 - 0.012") |
| Tank content, developer | 68: 6.8 l (1.80 US gal.) 85: 8.5 l (2.25 US gal.) |
| Tank content, wash | 15 l (3.96 US gal.) |
| Tank content, rinse | 68: 5.4 l (1.43 US gal.) 85: 6.7 l (1.77 US gal.) |
| Tank content, finisher | 68: 4.4 l (1.16 US gal.) 85: 5.5 l (1.45 US gal.) |
| Adjustable temperature, dev. | Ambient - 40°C (104°F) Adjustable from 20 - 40°C (68 - 104°F) |
| Adjustable temperature, wash | Ambient - 40°C (104°F) Adjustable from 20 - 40°C (68 - 104°F) |
| Adjustable temperature, rinse | Ambient - 48°C (118°F) Adjustable from 20 - 48°C (68 - 118°F) |
| Adjustable temperature, finisher | Ambient - 48°C (118°F) Adjustable from 20 - 48°C (68 - 118°F) |
| Adjustable temperature, dryer | 30 - 60°C (86 - 140°F) |
| Dwell times at 0.7 m (27.6") / min. | Developer: 15 sec. - Diffusion: 18 sec. Wash: 13 sec. - Rinse: 6 sec. - Finisher: 4 sec. |
| Water supply | Tap water, pressure 1- 6 bar / 15 - 87 psi |
| Wash | Tap water |
| Water consumption | 200 ml/m ² (0.053 US gal./m ²) |
| Diameter of rollers | 40 mm (0.16") |
| Area replenishment amount, dev. | 0 - 500 ml/m ² (0 - 0.132 US gal./m ²) |
| Warm up time max | < 30 min. from 18 - 40°C (64.4 - 104°F) |
| Level control | Yes |
| Power | 50-60 Hz, 230/400V, 1/3 |
| Power consumption | < 5.0 kW at 230 V |
| Voltage tolerance | +/- 10% |
| Weight | Non-crated: 275 kg (606 lbs) / 307 kg (677 lbs) Crated: 350 kg (772 lbs) / 388 kg (856 lbs) |

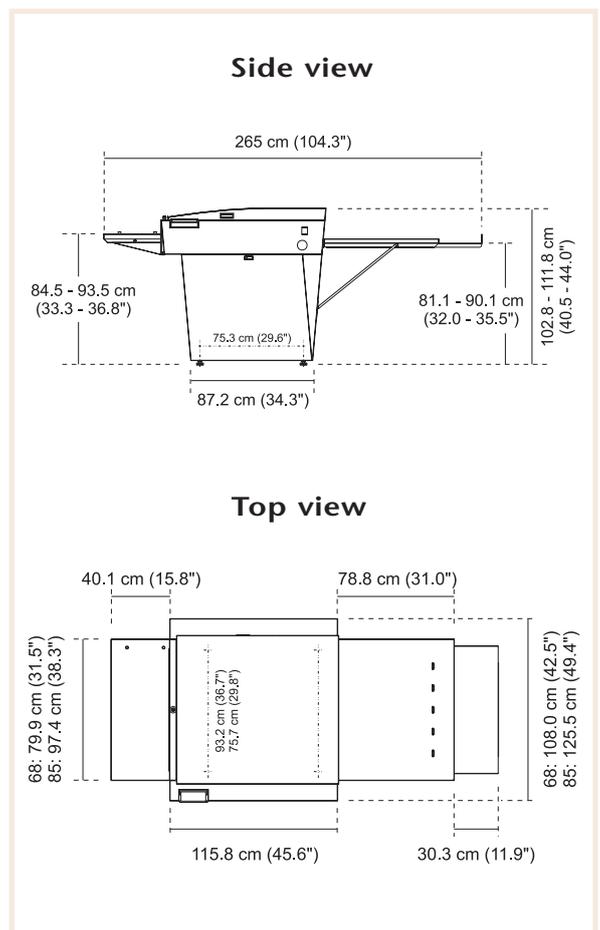

Specifications are subject to changes without prior notice.

GLUNZ & JENSEN

Headquarters:
Glunz & Jensen A/S
Haslevvej 13
4100 Ringsted
Denmark
Tel. +45 57 68 81 81
Fax +45 57 68 83 40
e-mail: gjqh@glunz-jensen.com
www.glunz-jensen.com

USA Operations:
Glunz & Jensen, Inc.
21405 Business Court
Elkwood, VA 22718-1757
USA
Tel. +1 540 825-7300
Fax +1 540 825-7525
e-mail: usva@glunz-jensen.com